

# PRODUCT INFORMATION

## MODEL G2200E X-TRA

### Product information

Battery	LFP battery (Lithium iron phosphate) 13,3 kWh / 260 Ah / 48V (195 kg)
Driving mechanism	Electric four wheel drive with cardan shaft and 12.500 N pulling force
Working hydraulics	35 ltr/min (170 bar)
Tyres	10.0/75x15.3 AS • <i>Total machine width: 108 cm</i>
Driving speed	3-speed (0-4,5 km/h, 0-12 km/h, 0-18 km/h) • <i>Measured on standard tyres</i>
Standard version	ROPS / FOPS safetyroof • <i>Incl. safety doors (L+R)</i>  Mechanically suspended seat • <i>Incl. safety belt, armrest and extended backrest</i>  1x Double acting hydraulic function on lifting arm, mechanical  Working light (LED) front, on lifting arm  Shunt coupling
Hitch	GIANT Standard hydraulic quick change system
Parking brake	Drum brakes
Colour	GIANT yellow / GIANT grey / black

### Tyres

27x10.50-15 SKID (116 cm)
29x12.50-15 GRASS (123 cm)
31x15.50-15 AS (128 cm)
31x15.50-15 X-TRAC (128 cm)
31x15.50-15 SKID (128 cm)
31x15.50-15 GRASS (135 cm)
Twin wheels: 10,0/75x15,3 AS (2 pcs); Only possible in combination with 10,0/75x15,3 AS

### Safetyroof / Cabin

ROPS / FOPS foldable safety roof
ROPS / FOPS cabin

### Hydraulic connections front

Up to 2 additional double-acting hydraulic functions, proportional or mechanically operated
Case drain
Free hydraulic return

### Electrical / lighting

Various 12-volt connections
Various work lights available in LED
Flashing/warning light LED
Flashers LED

### Towbars and counterweights

Shunt coupling + Tow ball
Counterweight (40 kg) under chassis (Max. 2)



### Technical data

Service weight <sup>1</sup>	2.200 kg
Lifting capacity	2.200 kg
Tipping load <sup>2</sup>	1.725 kg
Lifting height <sup>2, 3</sup>	2.450 mm
Length without bucket	3.054 mm
Width <sup>3</sup>	1.080 mm
Clearance height <sup>3, 4</sup>	2.300 mm


<sup>1</sup> Measured with standard version and earthbucket

<sup>2</sup> Measured on hinge point in straight position

<sup>3</sup> Measured on standard tyres

<sup>4</sup> Measured with standard safety roof

### Tipping loads

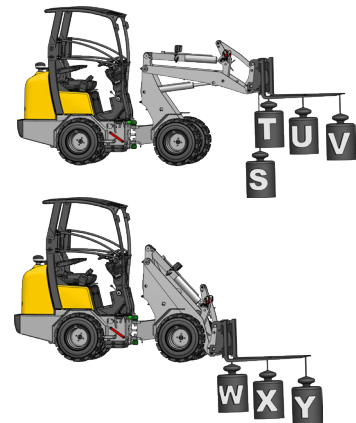

S	1.935 kg
T	1.775 kg
U	1.330 kg
V	1.010 kg
W	2.495 kg
X	1.725 kg
Y	1.230 kg