

PRODUCT INFORMATION

MODEL G2700 X-TRA HD

Product information

Engine type	Kubota D1803 CR (3 cylinder) Stage V
Engine power	50,4 HP / 37,0 kW
Driving mechanism	Hydrostatic four wheel drive with automotive control 8 tons planetary axles (HD version) with 20.000 N pulling force Limited slip on both axles
Driving hydraulics	75 ltr/min (420 bar)
Working hydraulics	51 ltr/min (230 bar)
Tyres	11.5/80-15.3 AS • <i>Total machine width: 110 cm</i>
Driving speed	2-speed (0-10 km/h, 0-25 km/h) • <i>Measured on standard tyres</i>
Standard version	ROPS / FOPS safety roof • <i>Incl. safety doors (L+R)</i> Mechanically suspended seat • <i>Incl. safety belt and armrest</i> 1x Double acting hydraulic function on lifting arm, mechanical Hydraulic servicebrake on 4 wheels Working light (halogen) front, on lifting arm Main switch Shunt coupling Oil cooler
Hitch	GIANT Standard hydraulic quick change system
Parking brake	Drum brakes
Colour	GIANT yellow / GIANT grey / black

Tyres

31x15.50-15 AS (131 cm)
31x15.50-15 X-TRAC (136 cm)
31x15.50-15 SKID (132 cm)
31x15.50-15 GRASS (131 cm)
33x15.50-15 X-TRAC (136 cm)
15.0/55x17 AS (130 cm)
425/40B17 GSP (135 cm)
Twin wheels: 11.5/80-15.3 AS (2 pcs); Only possible in combination with 11.5/80-15.3 AS

Hydraulic connections front

Up to 2 additional double-acting hydraulic functions, proportional or mechanically operated
Tandem pump, front <ul style="list-style-type: none"> Includes 1x extra single-acting hydraulic function Only possible in combination with free return Max. 60 ltr/min at 150 bar Electrically switchable
Additional function
Case drain
Free hydraulic return

More information about the G2700 X-TRA HD on the next page.



Technical data

Service weight ¹	2.550 kg
Lifting capacity	2.325 kg
Tipping load ²	2.220 kg
Lifting height ^{2,3}	2.498 mm
Length without bucket	3.470 mm
Width ³	1.100 mm
Clearance height ^{3,4}	2.340 mm


¹ Measured with standard version and earthbucket

² Measured on hinge point in straight position

³ Measured on standard tyres

⁴ Measured with standard safety roof

Tipping loads

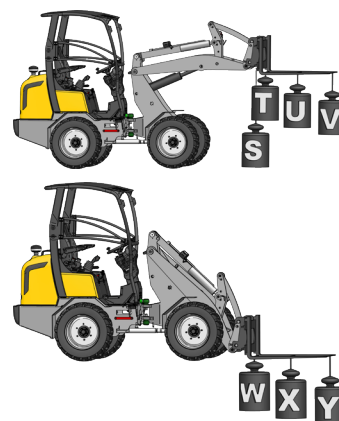

S	2.430 kg
T	2.235 kg
U	1.695 kg
V	1.300 kg
W	3.150 kg
X	2.220 kg
Y	1.600 kg

Safetyroof / Cabin

ROPS / FOPS foldable safety roof
ROPS / FOPS cabin

Hydraulic connections at the back

Extra double acting hydraulic function, mechanical served

Tandem pump, rear

- Includes 1x extra single-acting hydraulic function
- Only possible in combination with free return
- Max. 60 ltr/min at 150 bar
- Electrically switchable

Case drain

Free return

Towbars and counterweights

Shunt coupling (standard) + Tow ball

Counterweight 62 kg (max. 2 pcs) under machine

Other options

Pro-inching

STABILO systeem (Patented); Stabilizes the articulated pendulum joint of the machine

Electrical / Lighting

Various 12-volt connections

Various work lights available in LED or halogen

Flashing/warning light LED and halogen

Flashers LED
