

# PRODUCT INFORMATION

## MODEL G2700 X-TRA HD+



### Product information

Engine type	Kubota D1803 (3 cilinder) Stage V
Engine power	50,4 HP / 37,0 kW
Driving mechanism	Hydrostatic four wheel drive with automotive control 12 tons planetary axles (HD version) with 28.000 N pulling force 100% electrical differential lock on both axles
Driving hydraulics	121 ltr/min (400 bar)
Working hydraulics	51 ltr/min (230 bar)
Tyres	11.5/80-15.3 AS • <i>Total machine width: 114 cm</i>
Driving speed	2-speed (0-10 km/h, 0-30 km/h) • <i>Measured on standard tyres</i>
Standard version	ROPS / FOPS safety roof • <i>Incl. safety doors (L+R)</i>  Mechanically suspended seat • <i>Incl. safety belt and armrest</i>  1x Double acting hydraulic function on lifting arm, mechanical  Floating position on lifting cylinder(s)  Hydraulic servicebrake on 4 wheels  Working light (halogen) front, on lifting arm  Main switch  Shunt coupling  Oil cooler
Hitch	GIANT Standard hydraulic quick change system
Parking brake	Drum brakes
Colour	GIANT yellow / GIANT grey / black

### Tyres

31x15.50-15 AS (135 cm)
31x15.50-15 X-TRAC (136 cm)
31x15.50-15 SKID (136 cm)
31x15.50-15 GRASS (135 cm)
33x15.50-15 X-TRAC (140 cm)
15.0/55x17 AS (133 cm)
480/45x17 AS (148 cm)
420/55-17 AS; Not possible in combination with mudguard wideners (140 cm)
425/55-R17 AS (radial) (138 cm)
425/55-R17 Ridemax (radial); Not possible in combination with mudguard wideners (138 cm)
425/40B17 GSP (139 cm)
440/50-R17 AG (radial) (141 cm)
500/40x17.5 Flota 3; Not possible in combination with mudguard wideners (150 cm)
Twin wheels: 11.5/80-15.3 AS (2 pcs); Only possible in combination with 11.5/80-15.3 AS

### Electrical / Lighting

Various 12-volt connections
Various work lights available in LED or halogen
Flashing/warning light LED and halogen
Flashers LED

More information about the G2700 X-TRA HD+ on the next page.

### Technical data

Service weight <sup>1</sup>	2.600 kg
Lifting capacity	2.350 kg
Tipping load <sup>2</sup>	2.455 kg
Lifting height <sup>2,3</sup>	2.498 mm
Length without bucket	3.470 mm
Width <sup>3</sup>	1.140 mm
Clearance height <sup>3,4</sup>	2.340 mm


<sup>1</sup> Measured with standard version and earthbucket

<sup>2</sup> Measured on hinge point in straight position

<sup>3</sup> Measured on standard tyres

<sup>4</sup> Measured with standard safety roof

### Tipping loads

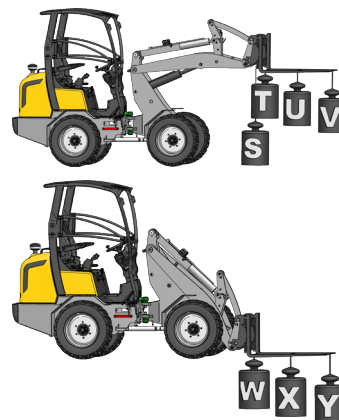

S	2.715 kg
T	2.490 kg
U	1.865 kg
V	1.420 kg
W	3.550 kg
X	2.455 kg
Y	1.750 kg

### Safetyroof / Cabin

ROPS / FOPS foldable safety roof
ROPS / FOPS cabin

## Hydraulic connections front

Up to 2 additional double-acting hydraulic functions, proportional or mechanically operated

Tandem pump, front

- Includes 1x extra single-acting hydraulic function
- Only possible in combination with free return
- Max. 60 ltr/min at 150 bar
- Electrically switchable

Case drain

Free hydraulic return

## Hydraulic connections at the back

Extra double acting hydraulic function, proportional or mechanical operated

Tandem pump, rear

- Includes 1x extra single-acting hydraulic function
- Only possible in combination with free return
- Max. 60 ltr/min at 150 bar
- Electrically switchable

Case drain

Free return

## Towbars and counterweights

Shunt coupling (standard) + Tow ball

Counterweight 62 kg (max. 2 pcs) under machine

## Other options

Pro-inching

STABILO systeem (Patented); Stabilizes the articulated pendulum joint of the machine