

PRODUCT INFORMATION

MODEL GS850T

Product information

Engine type	Kubota D722 (3 cylinder), diesel
Engine power	20 HP / 15 kW
Driving mechanism	Hydrostatic drive through 2 heavy wheel engines from Parker and 4.000 N pulling force Forwards, backwards and turning is easily done by spring loaded levers
Driving hydraulics	150 bar
Working hydraulics	42 ltr/min (150 bar)
Tyres	Tracks 180 (Total width 90 cm)
Driving speed	0-6 km/h • <i>Measured on standard tyres</i>
Standard version	1x Double acting hydraulic function on lifting arm, mechanical Hip bracket adjustable Single-side hydraulic hold on additional function • <i>On standard double acting hydraulic function on lifting arm</i> Parallel guidance on lifting arm (by compensating cylinder) Height-adjustable driver's plateau Hand throttle Oil cooler Lifting eyes
Hitch	GIANT Compact mechanical quick change system
Color	GIANT yellow / GIANT grey / black

Tyres

Tracks 230 (100 cm)

Other options

1x extra double acting hydraulic function, mechanical
Case drain at front
Free hydraulic return
Softbrake
Various work lights available in LED or halogen
12-volt connections
Counterweight 60 kg



Technical data



Service weight ¹	1.036 kg
Lifting capacity	576 kg
Tipping load ²	970 kg
Lifting height ³	2.060 mm
Length without bucket	1.371 mm
Width ³	900 mm

¹ Measured with earthbucket

² Measured on hinge point in straight position with counterweight and driver \pm 65 kg

³ Measured on standard tyres

Tipping loads

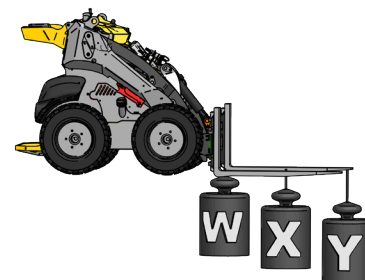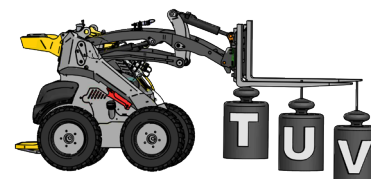

S	1.043 kg
T	970 kg
U	525 kg
V	360 kg
W	2.267 kg
X	735 kg
Y	435 kg