

PRODUCT INFORMATION

MODEL GS950T

Product information

Engine type	Kubota D902 (3 cylinder), diesel
Engine power	25 HP / 18,2 kW
Driving mechanism	Hydrostatic drive through 2 heavy wheel engines from Parker and 4.500 N pulling force Forwards, backwards and turning is easily done by spring loaded levers
Driving hydraulics	180 bar
Working hydraulics	42 ltr/min (180 bar)
Tyres	Tracks 180 (Total width 90 cm)
Driving speed	0-6 km/h • <i>Measured on standard tyres</i>
Standard version	1x Double acting hydraulic function on lifting arm, mechanical Hip bracket adjustable Single-side hydraulic hold on additional function • <i>On standard double acting hydraulic function on lifting arm</i> Parallel guidance on lifting arm (by compensating cylinder) Height-adjustable driver's plateau Hand throttle Oil cooler Lifting eyes
Hitch	GIANT Compact mechanical quick change system
Color	GIANT yellow / GIANT grey / black

Tyres

Tracks 230 (100 cm)

Other options

1x extra double acting hydraulic function, mechanical

Tandem pump, front

- *Includes 1x extra single-acting hydraulic function*
- *Only possible in combination with free return*
- *Max. 37,5 ltr/min at 150 bar*
- *Electrically switchable*

Case drain at front

Free hydraulic return

Softbrake

Various work lights available in LED or halogen

12-volt connections

Counterweight 60 kg



Technical data



Service weight ¹	1.036 kg
Lifting capacity	576 kg
Tipping load ²	970 kg
Lifting height ³	2.060 mm
Length without bucket	1.371 mm
Width ³	900 mm

¹ Measured with earthbucket

² Measured on hinge point in straight position with counterweight and driver \pm 65 kg

³ Measured on standard tyres

Tipping loads

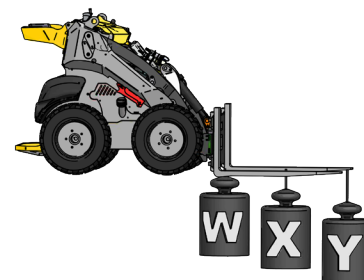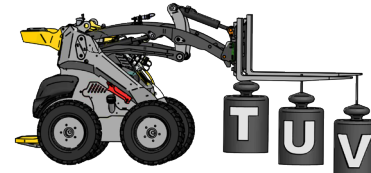

S	1.043 kg
T	970 kg
U	525 kg
V	360 kg
W	2.267 kg
X	735 kg
Y	435 kg